



65.7 kWm 1500 rev/min

75.6 kWm 1800 rev/min

Power Generation Application

High Power Density

More power output than competing products with close displacement, the power of 3-cylinder engine can reach the same level as 4-cylinder ones of competitor.

Low Fuel Consumption

The excellent combustion system can reduce fuel consumption, emission and noise, meanwhile increase engine power output.

Easy maintenance

Single side servicing for reduced service time and cost.

Durability & Reliability

Start normally at -10°C without preheated device, start smoothly at -25°C through flame glow plug cold start aid.

Maximum cooling efficiency is provided by a gear driven water pump and independent fan drive.

Leak free operation is ensured by Viton crankshaft seals and sophisticated controlled swell joints, giving protection in the toughest conditions.

1004TG GENSET POWER



Engine Speed (rev/min)	Type of Operation	Typical Generator Output (Net)		Engine Power			
				Gross		Net	
		kVA	kWe	kWm	bhp	kWm	bhp
1500	Prime Power	73.9	59.1	67.4	90.4	65.7	88.1
	Standby Power	81.3	65.0	74.2	99.5	72.3	97.0
1800	Prime Power	85.0	68.0	78.2	104.9	75.6	101.4
	Standby Power	93.6	74.8	86.0	115.3	83.2	111.6

All information in this document is substantially correct at time of printing and may be altered subsequently
 Publication No. 1666/08/10 Produced in China ©2010 Tianjin Lovol Engines Company Limited

1000 Series 1004TG

Standard Specification

Air inlet

- ✘ Mounted air filter and turbocharger

Fuel system

- ✘ In-line fuel injection pump
- ✘ Spin-on full flow fuel oil filters and pre-filter

Lubrication system

- ✘ Flat bottomed aluminium sump
- ✘ Spin-on full flow oil filters
- ✘ Oil cooler

Cooling system

- ✘ Thermostat controlled cooling system with gear driven water pump
- ✘ 20" belt-driven pusher fan and guards

Electrical system

- ✘ 12 volt starter motor and alternator
- ✘ 12 volt oil Pressure and coolant temperature switches
- ✘ 12 volt shut down solenoid

Flywheel and housing


- ✘ High inertia flywheel to SAE3 size 10/11½

Mountings

- ✘ Front engine mounting bracket

Optional Equipment

- ✘ 24 volt alternator
- ✘ 24 volt starter motor
- ✘ Rear engine mountings
- ✘ Workshop manual

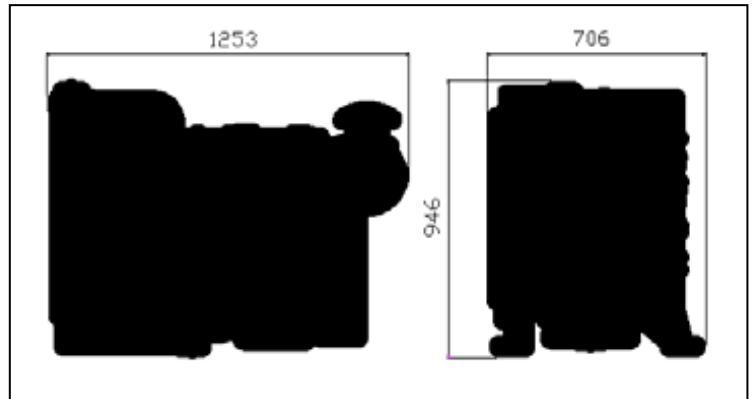

General Data

Cylinder number	4 in-line
Cylinder arrangement	Vertical in-line
Bore×stroke	100 mm×127 mm
Displacement	3.99 liters
Induction	Turbocharged
Cycle	4-stroke
Combustion system	Direct injection
Compression ratio	17.5:1
Direction of Rotation	Anti-clockwise viewed on flywheel
Lub. System Capacity	8.5 liters
Coolant capacity (inc. radiator)	20.6 liters
Length	1253mm
Width	706 mm
Height	946 mm
Dry weight	550 kg

Final weight and dimensions will depend on final specification.



Tianjin Lovol Engines Co., Ltd.

Jinwei Road, Beichen District, Tianjin China

Tel +86 (0)22 26992255

Fax +86 (0)22 26993784

www.lovolengines.com

All information in this document is substantially correct at the time of printing and may be altered subsequently

Distributed by